

Be Original.

The Do-it-all Document System That's One Step Ahead

High Productivity

- Wide variety of finishing options, including saddle stitch finishing, manual stapling, and stapleless stapling
- Accommodates standard paper sizes up to SRA3/A3 wide (13" x 19"), custom sizes up to 330 x 488 mm (13" x 19.2"), and paper thicknesses up to 300 g/m²
- Empty toner cartridge can be replaced without interrupting a copy/print job
- Envelopes feedable via standard paper tray
- 300-sheet DSPF scans documents at 240 opm*¹ (two-sided)
- DSPF handles paper up to 220 g/m² thick
- Business card feeder on DSPF scans batches of up to 150 cards and lets you create business card databases via OCR
- Copies business cards onto one sheet—1, 2, or 8 cards per sheet
- Embedded Fiery® Server (option) for managing busy on-demand printing environments
- Print Release function enables printout from any compatible networked MFP*²
- Direct printing of Microsoft Office (docx, xlsx, pptx) files*³

Exceptional Ease of Use

- DSPF pauses operation when it detects skewed or multiple sheets being fed in
- DSPF signals that document is placed ready for scanning and reminds user to retrieve document after scanning
- Easy UI mode on tiltable 10.1-inch colour LCD touchscreen
- Dedicated user icons allow quick login to personalised operation screen

Superb Image Quality

- True 1,200 × 1,200 dpi printing
- Automatically makes scan settings according to document type—provides optimal scan results

Secure Information Sharing

- Secondary Ethernet port to support additional network*⁴
- Sharpdesk Mobile print/scan application*⁵ enables scanned documents to be saved to a mobile device, or files on that device to be printed
- Supports various mobile printing services
- Application Portal*⁶ offers apps for downloading and installing onto MFP
- Easy access to public cloud services via single sign-on (option)
- Sends scanned data via Gmail™ or Microsoft Exchange*⁷/Online accounts
- Sharp OSA (Open Systems Architecture) allows integration with network and cloud-based applications (option)
- Advanced system/data protection and access control, including firmware self-recovery and whitelisting

*1: Originals per minute; when feeding A4 (8 1/2" x 11") sheets. *2: Contact a Sharp customer representative for details on the recommended maximum number of connectable MFPs. *3: This function is enabled via Qualcomm® DirectOffice™ technology. *4: Requires commercially available Ethernet adaptor that supports two lines. *5: Availability varies by country/region. *6: Contact a Sharp customer representative for details. *7: Exchange Server 2010/2013/2016/2019, Exchange Online



simply better **business**

MX-7081 Digital Full Colour Multifunctional System

SPECIFICATIONS

General

Type	Console
Engine speed	A4 (8 1/2" x 11") ^{*1} : Colour max. 80/70 ppm B/W max. 80/75 ppm
Control panel display	A3 (11" x 17") ^{**} : Max. 37/34 ppm SRA3: Max. 35/33 ppm
Paper size	10.1-inch colour LCD touchscreen
Paper capacity (80 g/m ²)	Max. SRA3/A3W (13" x 19"), min. A5 (5 1/2" x 8 1/2") ^{**2} Standard: 3,100 sheets (1,200-sheet tray, 800-sheet tray, 500-sheet tray x 2, and 100-sheet multi bypass tray) Maximum: 8,500 sheets (3,000 sheets & optional 2 x 2,500-sheet tray and 500-sheet multi bypass tray)
Paper weight	Tray 1&2: 60 g/m ² to 105 g/m ² (16 lbs bond to 28 lbs bond) Tray 3&4: 60 g/m ² to 300 g/m ² (16 lbs bond to 110 lbs cover) Multi bypass tray: [Standard] 55 g/m ² to 300 g/m ² (13 lbs bond to 110 lbs cover) [MX-MF11] 55 g/m ² to 220 g/m ² (13 lbs bond to 80 lbs cover) Large capacity tray: [MX-LC12/LCX3 N] 60 g/m ² to 220 g/m ² (16 lbs bond to 80 lbs cover) [MX-LC13 N] 55 g/m ² to 300 g/m ² (13 lbs bond to 110 lbs cover) 55 sec. ^{**4}
Warm-up time ^{**3}	55 sec. ^{**4}
Memory	6 GB (copy/print shared) 1 TB HDD ^{**5}
Power requirements	AC 220 V to 240 V, 8 A, 50/60 Hz (10 A plug x 2)
Power consumption (max.)	Max. 3.84 kW (220 V to 240 V)
Dimensions (W x D x H) ^{**6}	845 x 844 x 1,249 mm (33 9/32" x 33 15/64" x 49 3/16")
Weight (approx.)	209 kg (460.8 lbs)

Copier

Original paper size	Max. A3 (11" x 17")
First copy time ^{**7}	Full colour: 5.1/5.6 sec. B/W: 3.7/4.0 sec.
Continuous copy	Max. 9,999 copies
Resolution	Scan (colour): 600 x 600 dpi Scan (B/W): 600 x 600 dpi, 600 x 400 dpi Print (colour): 600 x 600 dpi, 9,600 (equivalent) x 600 dpi (depending on copy mode) Print (B/W): 1,200 x 1,200 dpi, 600 x 600 dpi, 9,600 (equivalent) x 600 dpi (depending on copy mode)
Gradation	Equivalent to 256 levels
Zoom range	25% to 400% (25% to 200% using DSPF) in 1% increments
Preset copy ratios	Metric: 10 ratios (5R/5E), inch: 8 ratios (4R/4E)


Scanner

Scan method	Push scan (via control panel) Pull scan (TWAIN-compliant application)
Scan speed ^{**9} (colour & B/W)	One-sided: Max. 120 originals/min. Two-sided: Max. 240 originals/min.
Resolution	Push scan: 100, 150, 200, 300, 400, 600 dpi Pull scan: 75, 100, 150, 200, 300, 400, 600 dpi 50 dpi to 9,600 dpi via user setting ^{**9}
File formats	TIFF, PDF, PDF/A-1a, PDF/A-1b, encrypted PDF, XPS, compact PDF ^{**10} , JPEG ^{**10} , searchable PDF, OOXML (pptx, xlsx, docx), text (TXT [UTF-8]), rich text (RTF)
Scan destinations	Scan to e-mail/desktop ^{**11} /FTP server/network folder (SMB)/USB drive/local drive

Document Filing

Document filing capacity ^{**12}	Main and custom folders: 35,000 pages or 5,000 files Quick file folder: 10,000 pages or 1,000 files
Stored jobs ^{**13}	Copy, print, scan, fax
Storage folders	Quick file folder, main folder, custom folder (max. 1,000 folders)

SYSTEM CONFIGURATION

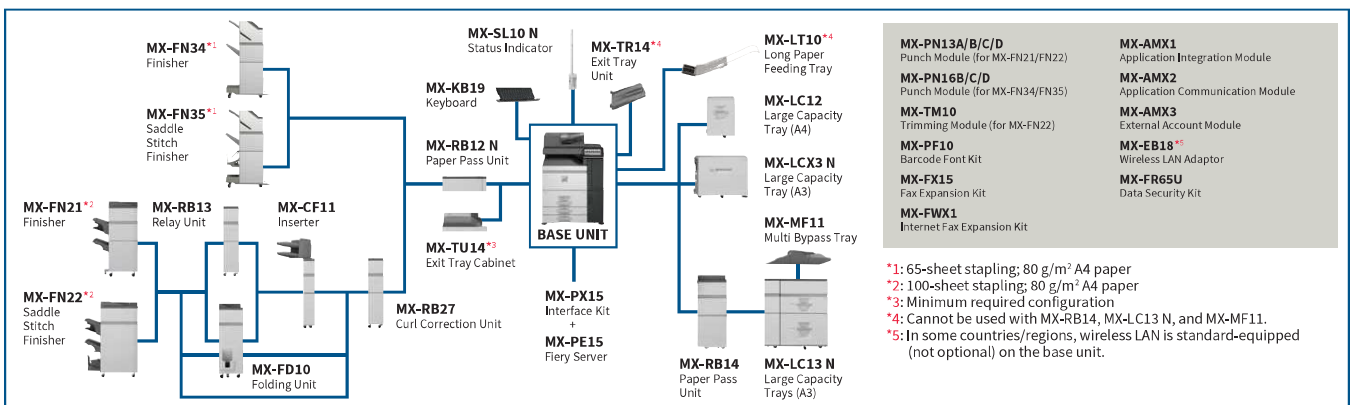

MX-PN13A/B/C/D Punch Module (for MX-FN21/FN22)	MX-AMX1 Application Integration Module
MX-PN16B/C/D Punch Module (for MX-FN34/FN35)	MX-AMX2 Application Communication Module
MX-TM10 Trimming Module (for MX-FN22)	MX-AMX3 External Account Module
MX-PF10 Barcode Font Kit	MX-EB18 ^{**5} Wireless LAN Adaptor
MX-FX15 Fax Expansion Kit	MX-FR65U Data Security Kit
MX-FWX1 Internet Fax Expansion Kit	

- *1: 65-sheet stapling; 80 g/m² A4 paper
- *2: 100-sheet stapling; 80 g/m² A4 paper
- *3: Minimum required configuration
- *4: Cannot be used with MX-RB14, MX-LC13 N, and MX-MF11.
- *5: In some countries/regions, wireless LAN is standard-equipped (not optional) on the base unit.

Printer

Resolution	1,200 x 1,200 dpi, 600 x 600 dpi, 9,600 (equivalent) x 600 dpi
Interface	USB 2.0 (host, high-speed), 10Base-T/100Base-TX/1000Base-T, wireless LAN (IEEE 802.11 b/g/n) ^{**14}
Supported OS	Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 8.1, Windows 10, Windows 11, Mac OS 10.9, 10.10, 10.11, 10.12, 10.13, 10.14, 10.15, 11, 12 TCP/IP
Network protocols	LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FTP for downloading print files, IPP, SMB, WSD
Printing protocols	PCL 6 emulation, Adobe PostScript 3
PDL	80 fonts for PCL, 139 fonts for Adobe PostScript 3
Available fonts	

Fiery® Server (requires optional MX-PE15 and MX-PX15)

Type	Embedded server
System software	Fiery FS400
Operating system	Linux
CPU	Intel® Pentium® G4400, 3.3 GHz
Memory	4 GB RAM 500 GB HDD
Resolution	1,200 x 1,200 dpi, 600 x 600 dpi (PS, PCL)
Supported OS	Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows 8.1, Windows 10, Windows 11, Mac OS 10.11, 10.12, 10.13, 10.14, 10.15, 11, 12 TCP/IP, LDAP, iPrint thru LPR
Network protocols	Gigabit Ethernet
Interface	LPD, PAP, SMB, port 9100, IPP 1.1, FTP printing, e-mail print, WSD
Printing protocols	Adobe PostScript 3
PDL	138 fonts for Adobe PostScript 3
Available fonts	
Power requirements	AC 100 V to 240 V, 50/60 Hz
Power consumption	Max. 0.15 kW
Dimensions (W x D x H)	271.5 x 296.9 x 89.4 mm (10 45/64" x 11 45/64" x 3 17/32")
Weight (approx.)	5.6 kg (12.3 lbs)

Facsimile (requires optional MX-FX15)

Compression method	MH/MR/MMR/JBIG
Communication protocol	Super G3/G3
Transmission time	Less than 3 seconds ^{**15}
Modem speed	33,600 bps to 2,400 bps with automatic fallback
Transmission resolution	From Standard (203.2 x 97.8 dpi) to Ultra Fine (406.4 x 391 dpi)
Recording size	A3 to A5 (11" x 17" to 5 1/2" x 8 1/2")
Memory	1 GB (built-in)
Greyscale levels	Equivalent to 256 levels

*1: Long-edge feeding. *2: Only short-edge feeding can be used with A5 (5 1/2" x 8 1/2") paper. *3: In a standard measurement environment. May vary depending on operating conditions and environment. *4: When starting the MFP via the power button. 66 seconds when starting via the main power switch. *5: HDD capacity depends on procurement and sourcing status. *6: Including adjusters and protuberances. *7: Long-edge feeding of A4 (8 1/2" x 11") sheets from 2nd paper tray, using document glass, without Auto Colour Selection and Auto Colour mode, MFP in fully ready condition. May vary depending on operating conditions and environment. *8: Based on Sharp's A4 standard chart, using document feeder, long-edge feeding, and factory default settings. Scan speed will vary depending on the type of document and the scan settings. *9: Resolution will vary depending on the size of the scanned area. *10: Colour/greyscale only. *11: Requires Network Scanner Tool Lite. *12: Storage capacity will vary depending on the type of document and the scan settings. *13: Some features require optional equipment. *14: In some countries/regions, the optional MX-EB18 is required. Availability of this option varies by country/region. *15: Based on Sharp's standard chart with approx. 700 characters (A4 or 8 1/2" x 11" long-edge feeding) at standard resolution in Super G3 mode, 33,600 bps, JBIG compression.

• Design and specifications are subject to change without prior notice. • Fiery is a registered trademark of Electronics for Imaging, Inc. in the US and/or certain other countries. Microsoft, Windows, and Windows Server are trademarks of the Microsoft group of companies. Gmail is a trademark of Google LLC. Mac is a trademark of Apple Inc., registered in the US and other countries. PCL is a registered trademark of Hewlett-Packard Company. Adobe and PostScript are either registered trademarks or trademarks of Adobe in the US and/or other countries. Intel and Pentium are trademarks of Intel Corporation or its subsidiaries in the US and/or other countries. Qualcomm DirectOffice is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the US and other countries. DirectOffice is a trademark of CSR Imaging US, LP, registered in the US and other countries. All other brand names and product names may be trademarks or registered trademarks of their respective owners.

Qualcomm® DirectOffice™

Certain optional equipment may not be available in some areas.



SHARP ELECTRONICS (VIETNAM) COMPANY LIMITED.
T5-B03.07 & T5-B03.09, 3rd Floor Masteri Thao Dien,
No. 159, Vo Nguyen Giap Street, Thao Dien Ward, Thu Duc city, Ho Chi Minh city
Website: vn.sharp Hotline: 1-800-1594
Service email: sbs-service@svn.sharp-world.com



Distributed by: